

ARIZONA TILE


LAGOS SERIES




Lagos Concrete 2 x 2 Mosaic 4 Inch Hex



Lagos Ivory 2 x 2 Mosaic 4 Inch Hex

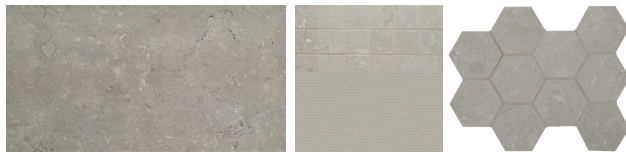

Lagos Light Grey 2 x 2 Mosaic 4 Inch Hex

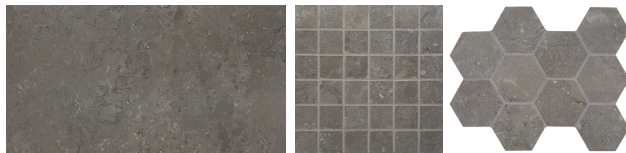


Lagos Mud 2 x 2 Mosaic 4 Inch Hex



Lagos Sand 2 x 2 Mosaic 4 Inch Hex

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.

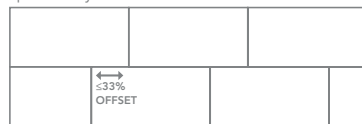

MADE IN ITALY

PRODUCT TYPE

Rectified Color Body Porcelain
Digital Print Technology

STOCKED COLORS

Lagos Concrete
Lagos Ivory
Lagos Light Grey
Lagos Mud
Lagos Sand

STOCKED SIZES

12 x 24 x 9mm
24 x 48 x 10mm
4 inch x 9mm Hex Mesh
2 x 2 x 9mm Mosaic Mesh

STOCKED TRIM

3 x 12 x 9mm SBN

DYNAMIC C.O.F. WET: ≥0.42

P.E.I. RATING: 4

FROSTPROOF: Yes

RECOMMENDED USES

Commercial
Residential
Interior Floor
Countertops
Interior Wall
Exterior Cladding
Fireplaces
Showers
*Shower Floors
Steam Showers
Pool & Spa (waterline)
* 2 x 2 Mosaic Mesh and 4 inch Hex Mesh Only

SPECIAL ORDER SIZES

**12 x 24 x 9mm (R11 Anti-Slip Only)
24 x 24 x 10mm
18 x 36 x 10mm
8 x 48 x 10mm
**24 x 48 x 10mm (R11 Anti-Slip Only)
24 x 36 x 2cm (Light Grey Only)

**Continue your indoor tile to your exterior living spaces with the R11 Anti-Slip finish (available in all colors). To be certified as R11 Anti-Slip, a tile must pass an internationally recognized analysis showing that a person can maintain balance while standing on the wet tile at an incline of up to 27 degrees.

Special Order: Please contact your Sales Representative or any Arizona Tile location for more details.

The Lagos series is an Italian-made rectified color body porcelain. Created using digital print technology, its pattern mimics the look of natural limestone, enhancing its organic appearance. Given the wide selection of color options available in the series, Lagos offers the timeless appeal of natural-stone with the practical properties of porcelain tile. Unlike limestone, minimal maintenance is required. Clean, rectified edges accommodate narrower grout joints thereby giving the illusion of an uninterrupted, honed surface.

Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. Because this material is a porcelain product, minimal maintenance is required. For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15", and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

SIZE	SF/PIECE	PIECES/BOX	SF/BOX	BOXES/PALLET	SF/PALLET
12 x 24 x 9mm	1.9368	6	11.6208	40	464.8320
24 x 48 x 10mm	7.7472	2	15.4944	35	542.3040
4 inch x 9mm Hex	0.8600	10	8.60	45	387.00
2 x 2 x 9mm Mosaic	0.9588	10 sheets	9.588	45	431.46
3 x 12 x 9mm SBN	N/A	30	N/A	N/A	N/A
12 x 24 x 9mm (R11 Anti-Slip Finish)	1.9368	6	11.6208	40	464.8320
24 x 24 x 10mm	3.8736	4	15.4944	30	464.8320
18 x 36 x 10mm	4.3578	3	13.0734	32	418.3488
8 x 48 x 10mm	2.5824	5	12.912	30	387.3600
24 x 48 x 10mm (R11 Anti-Slip Finish)	7.7472	2	15.4944	35	542.3040
24 x 36 x 2cm (Light Grey Only)	5.8857	1	5.8857	48	282.5146

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Standard packaging quantities are noted above, but variances may occur.

Please view actual material when making your selection, as the images on this page are only representative.