





Vetri Fume Polished



Vetri Acqua Polished

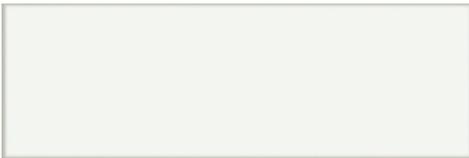

Vetri Bianco Polished

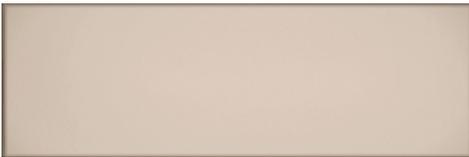

Vetri Bronzo Polished



Vetri Fume Polished



Vetri Naturale Polished

MADE IN ITALY

PRODUCT TYPE

Rectified Glazed Porcelain
Digital Print Technology

STOCKED COLORS

Vetri Acqua Polished
Vetri Bianco Polished
Vetri Bronzo Polished
Vetri Fume Polished
Vetri Naturale Polished

STOCKED SIZES

4 × 12 × 9mm
8 × 24 × 9mm
24 × 24 × 9mm

STOCKED TRIM

1/2 × 11-5/8 × 9mm Pencil Bullnose

RECOMMENDED USES

Commercial
Residential
Interior Floor
Interior Wall
Exterior Cladding
Fireplaces
Shower Walls
Steam Showers
Pool & Spa (waterline)

DYNAMIC C.O.F. WET: N/A

P.E.I. RATING: 4

FROSTPROOF: Yes

SPECIAL ORDER SIZE

12 × 24 × 9mm

*Special Order Item:

Please contact your sales representative or any Arizona Tile location for more details

The Vetri series is a rectified glazed porcelain tile created using digital print technology. While the tiles in this series could be classified as solid colors, the edges of each tile are tinted a darker shade to give the illusion of a pillowing, hand-made edge. This was created by scanning hand-made glass, therefore the edge effect will vary in width and intensity. This edge detail combined with its polished surface give the Vetri series the look of glass tile. However, unlike glass tile, this porcelain product is suitable as a residential or commercial flooring option and requires minimal maintenance.

Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. Because this material is a porcelain product, minimal maintenance is required. For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.



SIZE	SF/PIECE	PIECES/BOX	SF/BOX	BOXES/PALLET	SF/PALLET
4 × 12 × 9mm	0.3228	20	6.456	72	464.8320
8 × 24 × 9mm	1.2912	7	9.0384	48	433.8432
24 × 24 × 9mm	3.8736	3	11.6208	40	464.8321
1/2 × 11-5/8 × 9mm Pencil Bullnose	N/A	42	N/A	40	1680 pieces
12 × 24 × 9mm	N/A	N/A	N/A	N/A	N/A

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Standard packaging quantities are noted above, but variances may occur.

Please view actual material when making your selection, as the images on this page are only representative.