





Ardesia Grey

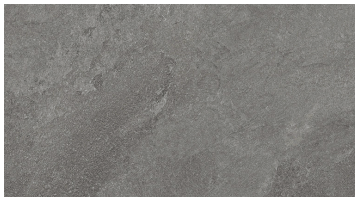


Ardesia Ash



2 x 2 Mosaic Mesh



Ardesia Black




2 x 2 Mosaic Mesh



Ardesia Grey



2 x 2 Mosaic Mesh

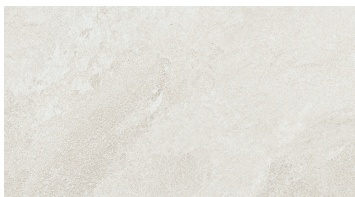

Ardesia Light



2 x 2 Mosaic Mesh

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.



**PRODUCT CONTAINS
≥15% PRE-CONSUMER
RECYCLED CONTENT**



PRODUCT TYPE

Rectified Color Body Porcelain
Digital Print Technology

STOCKED COLORS

Ardesia Ash
Ardesia Black
Ardesia Grey
Ardesia Light

STOCKED FINISHES

Matte

*R11 Finish

STOCKED SIZES

12 x 24

24 x 48

*24 x 48 R11 Finish

2 x 2 Mosaic Mesh

*Specifically designed for outdoor, exposed areas as well as wet applications, including shower floors. To be certified as R11, a tile must pass internationally-recognized testing.

To learn more, visit www.arizonatile.com

The Outer Limits® Collection includes products designed for outdoor living, featuring slip-resistant porcelain tiles, and countertop materials ideal for outdoor kitchens and exposed environments. Please confirm which exterior surface(s) a product is recommended for in the Products section of our website.

RECOMMENDED USES

Commercial
Residential
Interior Floor
*Exterior Floor
Interior Wall
Exterior Cladding
Fireplaces
Shower Walls
**Shower Floors
Steam Showers
Pool & Spa

*24 x 48 R11 Finish Only

**24 x 48 R11 Finish and 2 x 2 Mosaic Mesh Only

STOCKED TRIM

3 x 12 SBN

DYNAMIC C.O.F. WET: ≥0.42

P.E.I RATING: 3 (Black)

4 (Ash, Grey, & Light)

FROSTPROOF: Yes

DCOF rating is a measurement of a tile's frictional resistance. The above result is for the Standard Finish. The testing for R11 Finish is static, which is different from the Dynamic Coefficient of Friction (DCOF) test which is a dynamic test. These two tests measure for different and separate results, therefore the DCOF test is not the appropriate test for the R11 Finish.

The Ardesia series is an American-made rectified color body porcelain tile that is available in four colors. Created using digital print technology, Ardesia has the look of natural stone which makes it very versatile as it compliments both contemporary and traditional spaces.

Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. Because this material is a porcelain product, minimal maintenance is required.

For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

For packaging information, please contact your local Arizona Tile.

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Please view actual material when making your selection, as the images on this page are only representative.

Revised 03/09/26

www.arizonatile.com