





Fluida Aurea




Fluida Aurea

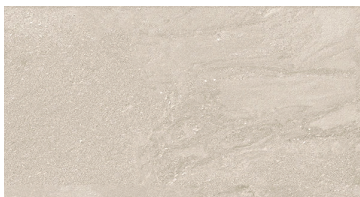


2 x 2 Mosaic Mesh

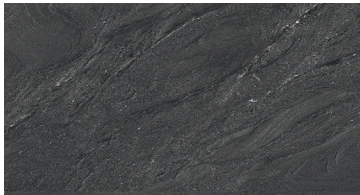


Fluida Carbo



2 x 2 Mosaic Mesh

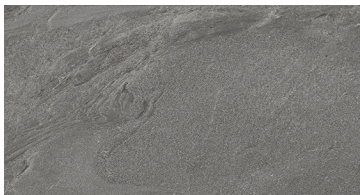

Fluida Graphite



2 x 2 Mosaic Mesh



Fluida Luminis



2 x 2 Mosaic Mesh



Fluida Nebula



2 x 2 Mosaic Mesh

MADE IN ITALY

PRODUCT TYPE

Rectified Color Body Porcelain
3D Digital Print Technology

STOCKED COLORS

Fluida Aurea
Fluida Carbo
Fluida Graphite
Fluida Luminis
Fluida Nebula

STOCKED FINISHES

Matte

*Active R11 Finish™

STOCKED SIZES

12 x 24

8 x 48

24 x 48

*24 x 48 Active R11 Finish

2 x 2 Mosaic Mesh

4" Hex Mesh

Trapezoid Mesh

*Specifically designed for outdoor, exposed areas as well as wet applications, including shower floors. To be certified as R11 Finish, a tile must pass internationally-recognized testing.

To learn more, visit www.arizonatile.com

RECOMMENDED USES

Commercial
Residential
Interior Floor
*Exterior Floor
Interior Wall
Exterior Cladding
Fireplaces
Shower Walls
**Shower Floors
Steam Showers
Pool & Spa
*24 x 48 Active R11 Finish Only
**2 x 2 Mosaic Mesh, 4" Hex Mesh and 24 x 48 Active R11 Finish Only

STOCKED TRIM

3 x 12 SBN

DYNAMIC C.O.F. WET: ≥ 0.42

P.E.I. RATING: 4

FROSTPROOF: yes

DCOF rating is a measurement of a tile's frictional resistance. The above result is for the Standard Finish. The testing for Active R11 Finish is static, whereas the Dynamic Coefficient of Friction (DCOF) is a dynamic test. These two tests measure for different and separate results, therefore the DCOF test is not the appropriate test for the Active R11 Finish. To be certified as Active R11 Finish, a tile must pass internationally-recognized testing.

The Fluida series is an Italian-made rectified color body porcelain that is available in two finishes, including the Active R11 Finish™. Created using 3D digital print technology, the Fluida porcelain tile design mimics a natural stone with layers of minerals accumulated over time which create visually interesting patterns.

Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. Because this material is a porcelain product, minimal maintenance is required.

For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.



PRODUCT CONTAINS
>20%PRE-CONSUMER
RECYCLED CONTENT

For packaging information, please contact your local Arizona Tile.

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Please view actual material when making your selection, as the images on this page are only representative.

Revised 06/30/25

www.arizonatile.com