



# ARIZONA TILE

# INDUSTRIAL SERIES

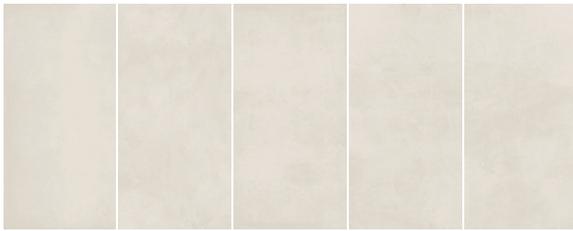


Industrial Ivory

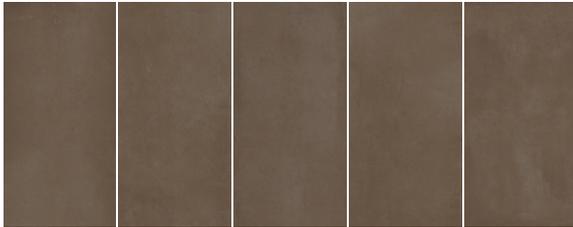

Industrial Moka



Industrial Sage

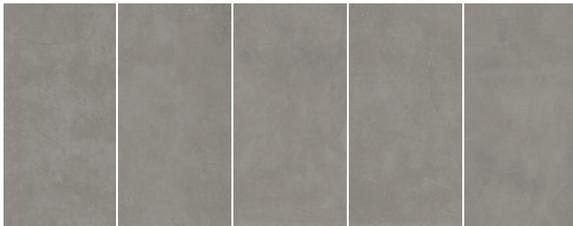


Industrial Steel



Industrial Taupe

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.



**PRODUCT CONTAINS  
> %20 PRE-CONSUMER  
RECYCLED CONTENT**

## MADE IN ITALY

### PRODUCT TYPE

Rectified Color Body Porcelain  
Digital Print Technology

### STOCKED COLORS

Industrial Ivory  
Industrial Moka  
Industrial Sage  
Industrial Steel  
Industrial Taupe

### STOCKED FINISHES

Matte  
R11 Finish

### STOCKED SIZES

12 × 24  
\*12 × 24 R11 Finish   
24 × 48  
48 × 48 **Coming Soon**  
2 × 2 Mosaic Mesh **Coming Soon**

### STOCKED TRIM

3 × 12 SBN **Coming Soon**

\*Specifically designed for outdoor, exposed areas as well as wet applications, including shower floors. To be certified as R11, a tile must pass internationally-recognized testing.

To learn more, visit [www.arizonatile.com](http://www.arizonatile.com)

The Outer Limits® Collection includes products designed for outdoor living, featuring slip-resistant porcelain tiles, and countertop materials ideal for outdoor kitchens and exposed environments. Please confirm which exterior surface(s) a product is recommended for in the Products section of our website.

The Industrial series is an Italian-made rectified color body porcelain. It embodies the soft variations typically seen in concrete surfaces, offered in five colors to accommodate a variety of spaces. Because this material is a porcelain product, minimal maintenance is required.

There can be noticeable variances between pieces, so it is important and recommended that a range of this product be viewed before finalizing a purchase. Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected.

For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

### RECOMMENDED USES

Commercial  
Residential  
Interior Floor  
\*Exterior Floor  
Interior Wall  
Exterior Cladding  
Fireplaces  
Shower Walls  
\*\*Shower Floors  
Steam Showers  
Pool & Spa

\*12 × 24 R11 Finish Only

\*\*2 × 2 Mosaic Mesh & 12 × 24 R11 Finish Only

**DYNAMIC C.O.F. WET: ≥0.42**

**P.E.I. RATING: 4**

**FROSTPROOF: Yes**

DCOF rating is a measurement of a tile's frictional resistance. The above result is for the Standard Finish. The testing for R11 Finish is static, which is different from the Dynamic Coefficient of Friction (DCOF) test which is a dynamic test. These two tests measure for different and separate results, therefore the DCOF test is not the appropriate test for the R11 Finish.

For packaging information, please contact your local Arizona Tile.

**DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.**

Please view actual material when making your selection, as the images on this page are only representative.

Revised 03/25/26

[www.arizonatile.com](http://www.arizonatile.com)