


ARIZONA TILE

CLASSIC LIMESTONE



Honed 18 × 18

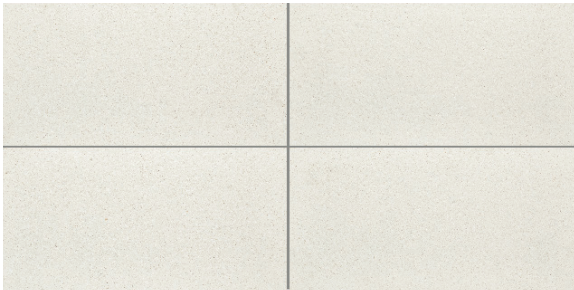

Brushed 12 × 24



Honed 12 × 24



Honed 18 × 18



Split 4 × 16 (4pcs)

PRODUCT TYPE

Limestone

ORIGIN

Turkey

STOCKED FINISHES

Brushed (B)

Honed (H)

Split (S)

STOCKED SIZES

4 × 16 (S)

12 × 24 × 3/8 (B, H) ☀

18 × 18 × 24 (H) ☀

☀ The Outer Limits® Collection includes flooring products designed for outdoor living, featuring slip-resistant porcelain tiles and countertop materials ideal for outdoor kitchens and exposed environments.

To learn more, visit www.arizonatile.com

RECOMMENDED USES

Commercial (vertical only)

Residential

*Interior Floor

*Exterior Floor

Interior Wall

Exterior Cladding

Fireplaces

**Shower Walls

*Excludes Split

**When installed in interior wet areas, the product must be sealed and maintained properly. If it is not, the appearance of the product could be altered. Please contact your installer or sales representative for more information.

Classic Limestone is quarried in Finike, Turkey which is a city on the coast of the Mediterranean in South Turkey. It is very dense, making it suitable for interior and exterior applications. This is a sedimentary stone that is formed in shallow seas and is composed mainly of calcite calcium carbonate. One of the unique characteristics of this limestone is the existence of some small shells and fossils that may appear throughout the tile. It is possible to have fill and small pin holes in this product. It is a natural characteristic of the stone. Split 4 × 16 tiles are intended to be installed closely together, without a grout joint, so grouting is not recommended. It is recommended to clean and seal the stone after installation. There can be noticeable variances between pieces, so it is important and recommended that a range of this product be viewed before finalizing a purchase.

Piece to piece variation in shade or color are inherent in all natural stone products; therefore, when installing natural stone tile, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. As a natural stone product, it is recommended that it be sealed to extend its longevity. For proper bonding LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with dimensional length greater than 15 in. and rectangular shape and plank tile per industry standards. Proper thinset coverage is also necessary and in some cases back buttering of the tile may be required.