

ARIZONA TILE


LAGOS SERIES




Lagos Concrete 2 x 2 Mosaic 4 Inch Hex



Lagos Ivory 2 x 2 Mosaic 4 Inch Hex

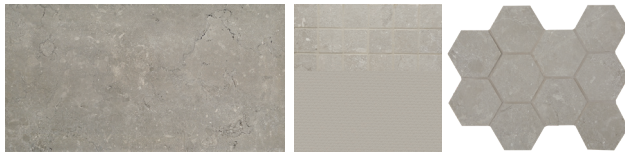

Lagos Light Grey 2 x 2 Mosaic 4 Inch Hex

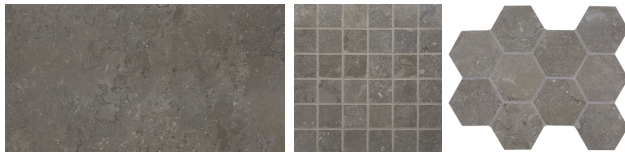

Lagos Mud 2 x 2 Mosaic 4 Inch Hex



Lagos Sand 2 x 2 Mosaic 4 Inch Hex

MADE IN ITALY

PRODUCT TYPE

Rectified Color Body Porcelain
Digital Print Technology

STOCKED COLORS

Lagos Concrete
Lagos Ivory
Lagos Light Grey
Lagos Mud
Lagos Sand

STOCKED SIZES

12 x 24 x 9mm
24 x 48 x 10mm
4 inch x 9mm Hex Mesh
2 x 2 x 9mm Mosaic Mesh

STOCKED TRIM

3 x 12 x 9mm SBN

The Lagos series is an Italian-made rectified color body porcelain. Created using digital print technology, its pattern mimics the look of natural limestone, enhancing its organic appearance. Given the wide selection of color options available in the series, Lagos offers the timeless appeal of natural-stone with the practical properties of porcelain tile. Unlike limestone, minimal maintenance is required. Clean, rectified edges accommodate narrower grout joints thereby giving the illusion of an uninterrupted, honed surface.

Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. Because this material is a porcelain product, minimal maintenance is required. For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

RECOMMENDED USES

- Commercial
- Residential
- Interior Floor
- Interior Wall
- Exterior Cladding
- Fireplaces
- Shower Walls
- *Shower Floors
- Steam Showers
- Pool & Spa (waterline)
- * 2 x 2 Mosaic Mesh and 4 inch Hex Mesh Only

SPECIAL ORDER

Special Order Sizes and Finishes Available:
Please contact your Sales Representative for more details.

DYNAMIC C.O.F. WET: ≥0.42

P.E.I. RATING: 4

FROSTPROOF: Yes

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.



SIZE	SF/PIECE	PIECES/BOX	SF/BOX	BOXES/PALLET	SF/PALLET
12 x 24 x 9mm	1.9368	6	11.6208	40	464.8320
24 x 48 x 10mm	7.7472	2	15.4944	35	542.3040
4 inch x 9mm Hex	0.8600	10	8.60	45	387.00
2 x 2 x 9mm Mosaic Mesh	0.9588	10 sheets	9.588	45	431.46
3 x 12 x 9mm Surface Bullnose (SBN)	N/A	30	N/A	N/A	N/A

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Standard packaging quantities are noted above, but variances may occur.

Please view actual material when making your selection, as the images on this page are only representative.