

ARIZONA TILE

TRU MARMI SERIES



Tru Marmi Gold

Tru Marmi Arabescato



12 x 24

2 x 2 (M)

4 Inch Hex Mesh (M)

Tru Marmi Extra



12 x 24

2 x 2 (M)

4 Inch Hex Mesh (M)

Tru Marmi Gold




12 x 24

2 x 2 (M)

4 Inch Hex Mesh (M)

Tru Marmi Silver

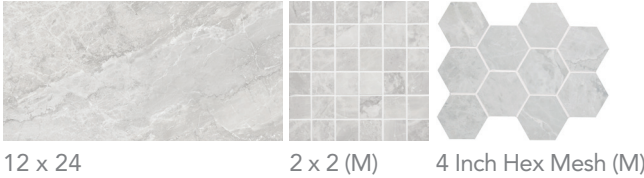


12 x 24

2 x 2 (M)

4 Inch Hex Mesh (M)

Tru Marmi Venatino

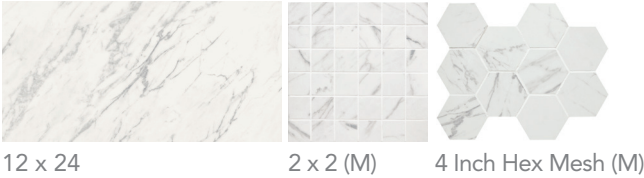

12 x 24

2 x 2 (M)

4 Inch Hex Mesh (M)

MADE IN ITALY

PRODUCT TYPE

Rectified Glazed Porcelain
Digital Print Technology

STOCKED COLORS

Tru Marmi Arabescato
Tru Marmi Extra
Tru Marmi Gold
Tru Marmi Silver
Tru Marmi Venatino

STOCKED FINISHES

Matte (M)
Polished (P)

STOCKED SIZES

12 x 24 x 10mm (M & P)
24 x 48 x 10mm (M & P)
4 Inch Hex Mesh (M)
2 x 2 x 10mm Mosaic Mesh (M)

RECOMMENDED USES

Commercial
Residential
Interior Floor
Interior Wall
Exterior Cladding
Fireplaces
Shower Walls
*Shower Floors
Steam Showers
Pool & Spa (waterline)
*2 x 2 Mosaic Mesh and 4 Inch Hex Mesh Only

STOCKED TRIM

1/2 x 11-5/8 x 10mm
Pencil Bullnose (M & P)
3 x 12 x 10mm
Surface Bullnose (M & P)


D.C.O.F. WET: ≥0.42 (matte)

P.E.I. RATING: 4

FROSTPROOF: Yes

The Tru Marmi Series is a rectified glazed porcelain. Digital print technology creates some of the same characteristics as some of the most sought-after natural stones, including marble. Because this material is a porcelain product, maintenance risks involved with actual stone are eliminated. There will be noticeable variations in color and movement between pieces. Therefore, it is important and recommended that a range of this product be viewed before finalizing a purchase. Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. This series is suitable for residential and commercial applications. For proper bonding, LHT/LFT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.



SIZE	SF/PIECE	PIECES/BOX	SF/BOX	BOXES/PALLET	SF/PALLET
12 x 24 x 10mm	1.9368	7	13.5576	32	433.8432
24 x 48 x 10mm	7.7472	2	15.4944	24	371.8656
4 Inch Hex Mesh	0.86	10	8.6	45	387
2 x 2 x 10mm Mosaic Mesh	0.9588	10	9.588	45	431.4600
1/2 x 11-5/8 x 10mm Pencil Bullnose	N/A	TBD	N/A	TBD	TBD
3 x 12 x 10mm Surface Bullnose	N/A	30	N/A	72	2160 pieces/pallet

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Standard packaging quantities are noted above, but variances may occur.

Please view actual material when making your selection, as the images on this page are only representative.