


# ARIZONA TILE


# COSMIC SERIES



Cosmic Grey

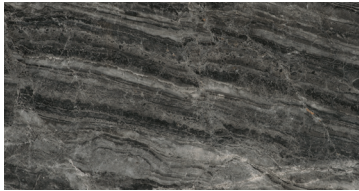

Cosmic Black



2 x 2 Mosaic Mesh



Cosmic Grey




2 x 2 Mosaic Mesh



Cosmic Ivory



2 x 2 Mosaic Mesh

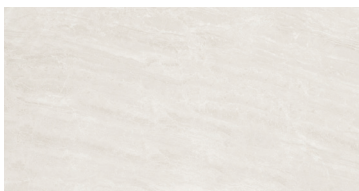

Cosmic White



2 x 2 Mosaic Mesh

## MADE IN ITALY

### PRODUCT TYPE

Rectified Glazed Porcelain  
Digital Print Technology

### STOCKED COLORS

Cosmic Black  
Cosmic Grey  
Cosmic Ivory  
Cosmic White

### STOCKED SIZES

12 x 24  
24 x 48  
2 x 2 Mosaic Mesh

### STOCKED TRIM

3 x 12 SBN

### RECOMMENDED USES

Commercial  
Residential  
Interior Floor  
Interior Wall  
Exterior Cladding  
Fireplaces  
Shower Walls  
\*Shower Floors  
Steam Showers  
Pool & Spa  
\*2 x 2 Mosaic only

### SPECIAL ORDER

Special Order Sizes and Finishes Available:  
Please contact your Sales Representative for more details.

**DYNAMIC C.O.F. WET:**  $\geq 0.42$


**P.E.I. RATING:** 4

**FROSTPROOF:** Yes

The Cosmic series is an Italian-made rectified glazed porcelain. Created using digital print technology, its pattern mimics the look of natural stone, enhancing its organic appearance. Given the beautiful selection of color options available in the series, Cosmic offers the timeless appeal of natural-stone with the practical properties of porcelain tile. Unlike natural stone, minimal maintenance is required.

Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. Because this material is a porcelain product, minimal maintenance is required. For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.

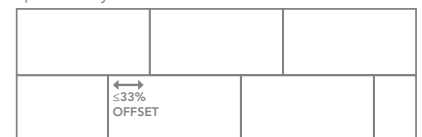

For packaging information, please contact your local Arizona Tile.

*DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.*

Please view actual material when making your selection, as the images on this page are only representative.

Revised 05/01/24

www.arizonatile.com