

ARIZONA TILE


TERRAZZO SERIES




Terrazzo Grey



Terrazzo Black



2 x 2 Mosaic



4 Inch Hex Mesh




Terrazzo Cream




2 x 2 Mosaic




4 Inch Hex Mesh



Terrazzo Grey



2 x 2 Mosaic




4 Inch Hex Mesh



Terrazzo Pearl



2 x 2 Mosaic



4 Inch Hex Mesh



Terrazzo White



2 x 2 Mosaic



4 Inch Hex Mesh

MADE IN ITALY

PRODUCT TYPE

Rectified Color Body Porcelain
Digital Print Technology

STOCKED COLORS

Terrazzo Black
Terrazzo Cream
Terrazzo Grey
Terrazzo Pearl
Terrazzo White

STOCKED SIZES

24 x 24
2 x 2 Mosaic Mesh
4 Inch Hex Mesh

STOCKED TRIM

3 x 24 SBN

RECOMMENDED USES

Commercial
Residential
Interior Floor
Interior Wall
Exterior Cladding
Fireplaces
Shower Walls
*Shower Floors
Steam Showers
Pool & Spa
*2 x 2 Mosaic Mesh and 4 Inch Hex Only

D.C.O.F. WET: ≥ 0.42

P.E.I. RATING: 4


FROSTPROOF: Yes

Terrazzo is a porcelain product with a flecked pattern that is offered in a variety of neutral colors. Contributing to the resurgence of mid-century design, Terrazzo adds a clean and modern appeal reminiscent of classic modern architecture. Terrazzo pairs well with a variety of natural materials, creating installations that are contemporary and unique.

Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. Because this material is a porcelain product, minimal maintenance is required.

For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

When installing rectangular or square tiles 15 inches or longer with a staggered joint, industry standard is that the offset should not exceed 33%, unless otherwise specified by the manufacturer.

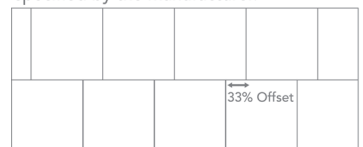

For packaging information, please contact your local Arizona Tile.

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Please view actual material when making your selection, as the images on this page are only representative.

Revised 05/07/24

www.arizonatile.com