

# ARIZONA TILE

# COVE SERIES




Cove Breeze



2 x 2 Mosaic Mesh



Cove Coal



2 x 2 Mosaic Mesh



Cove Coast



2 x 2 Mosaic Mesh




Cove Fog



2 x 2 Mosaic Mesh



Cove Ivory



2 x 2 Mosaic Mesh



Cove Linen



2 x 2 Mosaic Mesh



Cove Pebble



2 x 2 Mosaic Mesh



## PRODUCT TYPE

Color Body Porcelain  
Digital Print Technology

## STOCKED COLORS

Cove Breeze  
Cove Coal  
Cove Coast  
Cove Fog  
Cove Ivory  
Cove Linen  
Cove Pebble

## STOCKED SIZES

12 x 24  
2 x 2 Mosaic Mesh

## STOCKED TRIM

3 x 12 SBN

The Cove series is an American-made porcelain tile. The movement and delicate reliefs on the surface of this tile combined with neutral tones give this series a handcrafted look suitable for every kind of application. Because this material is a porcelain product, minimal maintenance is required. This series is suitable for residential and commercial applications.

There can be noticeable variances between pieces, so it is important and recommended that a range of this product be viewed before finalizing a purchase. When mixing sizes within a series, shade, texture and calibration differences should be expected. Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color.

For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

## RECOMMENDED USES


Commercial  
Residential  
Interior Floor  
Interior Wall  
Exterior Cladding  
Fireplaces  
Shower Walls  
\*Shower Floors  
Steam Showers  
Pool & Spa  
\* 2 x 2 Mosaic Mesh Only

**DYNAMIC C.O.F. WET:**  $\geq 0.42$

**P.E.I. RATING:** 4

**FROSTPROOF:** Yes

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.

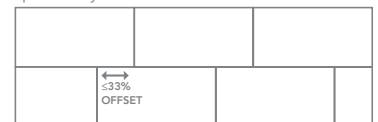

For packaging information, please contact your local Arizona Tile.

*DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.*

Please view actual material when making your selection, as the images on this page are only representative.

Revised 10/14/24

www.arizonatile.com