

ARIZONA TILE

FUSION SERIES



Fusion Cemento



Fusion Bianco



2"x2" Mosaic



1"x12" Stagger Stack



Fusion Cemento



2"x2" Mosaic



1"x12" Stagger Stack



Fusion Cotto



2"x2" Mosaic



1"x12" Stagger Stack



Fusion Piombo



2"x2" Mosaic



1"x12" Stagger Stack

MADE IN ITALY

PRODUCT TYPE

Rectified Color Body Porcelain
Digital Print Technology

COLORS

Fusion Bianco
Fusion Cemento
Fusion Cotto
Fusion Piombo

SIZES

16"×32"
24"×24"
2"×2" Mosaic
1"×12" Stagger Stack

RECOMMENDED USES

Commercial & Residential
Interior & Exterior
Floor & Wall
Backsplashes
Countertops
Fireplaces
Tub Surrounds & Showers
Vanities
Pools

TRIM

3"×24" SBN

P.E.I. RATING: 5


FROSTPROOF: Yes

D.C.O.F. WET: 0.46

The Fusion Series is a rectified color body porcelain that is produced to be a simple and modern option for all applications. It is available in four colors, with slight variation between pieces, that provide an industrial and commercial aesthetic to any environment. When mixing sizes within a series, shade, texture and calibration differences should be expected. Because this material is a porcelain product, minimal maintenance is required. This series is suitable for residential and commercial applications.

For proper bonding, LHT/LFT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15", and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.

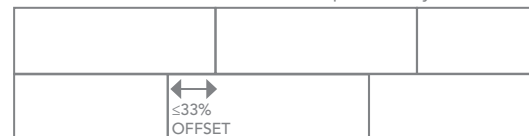

SIZE	SF/PIECE	PIECES/BOX	SF/BOX	BOXES/PALLET	SF/PALLET
16"×32"	3.4432	3 4	10.3296 13.7728	28 24	289.2288 330.5472
24"×24"	3.8736	4	15.4944	30	464.8320
2"×2" Mosaic	0.9588	10 sheets	9.588	45	431.46
1"×12" Stagger Stack	0.9555 / sheet	10	9.555	45	429.975

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Standard packaging quantities are noted above, but variances may occur.

Please view actual material when making your selection, as the images on this page are only representative.

www.arizonatile.com