

ARIZONA TILE

FARO SERIES




Faro Beige 12 × 24



Faro Beige



2 × 2 Mosaic Mesh

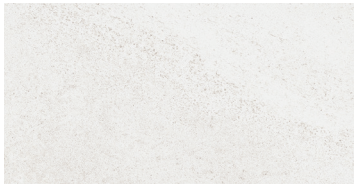

Faro Bianco



2 × 2 Mosaic Mesh



Faro Silver



2 × 2 Mosaic Mesh



Faro Taupe Grey



2 × 2 Mosaic Mesh

MADE IN ITALY

PRODUCT TYPE

Rectified Glazed
Color Body Porcelain
Digital Print Technology

STOCKED COLORS

Faro Beige
Faro Bianco
Faro Silver
Faro Taupe Grey

STOCKED SIZES

12 × 24
24 × 48
2 × 2 Mosaic Mesh

STOCKED TRIM

3 × 12 SBN

RECOMMENDED USES

Commercial
Residential
Interior Floor
Interior Wall
Exterior Cladding
Fireplaces
Shower Walls
*Shower Floors
Steam Showers
Pool & Spa
*2 × 2 Mosaic Mesh Only

DYNAMIC C.O.F. WET: ≥ 0.42

P.E.I. RATING: 4


FROSTPROOF: Yes

The Faro series is an Italian-made rectified glazed color body porcelain tile available in four neutral colors. Created using digital print technology, Faro offers an organic aesthetic to your environment with soft patterning and subtle veining featured across the surface of each color.

Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. Because this material is a porcelain product, minimal maintenance is required.

For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.

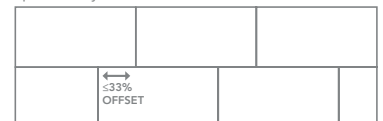

**PRODUCT CONTAINS
≥30% PRE-CONSUMER
RECYCLED CONTENT**

For packaging information, please contact your local Arizona Tile.

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Please view actual material when making your selection, as the images on this page are only representative.

Revised 05/01/24

www.arizonatile.com